


## OVERVIEW

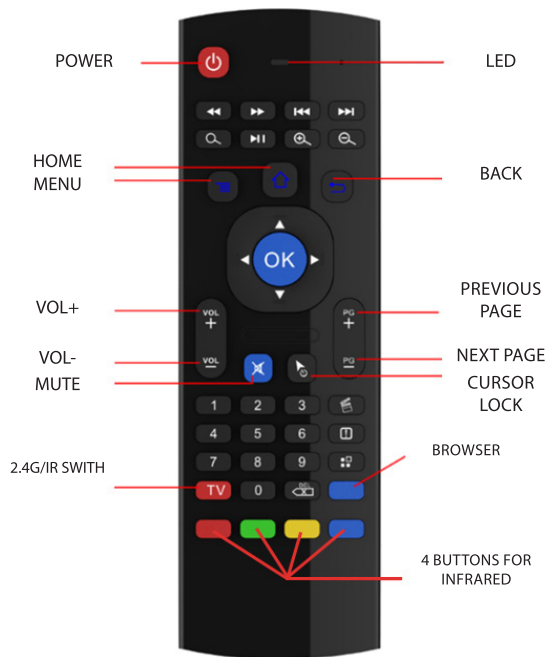

## **How to use**

Using with RF dongle:

Insert the RF dongle to the PC computer or the TV set, then press the OK button and BACK button on the panel at the same time for 3 seconds, then release the buttons. If air mouse can move normally means that pairing is successful.

## **Function of the key**

HOME: after entering the sub-menu you can back to the original main page directly.

BACK: you can press the BACK key to make the unit into previous interface.

CURSOR LOCK: short press to lock the cursor, and press again to unlock the cursor.

TV: short press to switch between 2.4G state and infrared state, press and hold to open IR learning mode.

Cursor speed regulation

1) from slow to fast: Press HOME button and Vol+ button at the same time for 3 seconds to speed the cursor.

2) from fast to slow: Press HOME button and Vol- button at the same time for 3 seconds to slow the cursor.

## **LED description**

After the remote controller has paired to the terminal equipment, LED will light with the button pressed, LED off when button released.

## **How to use IR learn function (example for power button)**

Power button always work as IR button, you can use learning mode to program IR power button from original remote control of your TV set. Do following steps:

1) short press TV button, the air mouse switches to infrared mode.

2) long press TV button for 3 seconds, the LED blinks very fast, then blinking slowly, air mouse is waiting to capture signal from original remote.

3) keep the air mouse and original remote facing each other, head to head within 2 cm. Then press the power button on the original remote. Hold as long as LED stop blinking and stay constantly on to confirm successful capturing.

4) press Power button on the air mouse, LED start to blinking again.

5) press TV button on the air mouse to exit learning mode.

Note! You can use this method to program IR color buttons like: VOL-, VOL+, CH-, CH+. Other buttons and functions will work automatically when RF dongle is plugged to TV set.

## **Instructions of the keyboard operation**

The keyboard contains 38 keys.

Backspace: delete previous character.

CAPS: Caps lock.

ENTER: Confirm the operation.

SPACE: Spacebar.

ALT: Numeric characters switch

## **Troubleshooting**

Q: How to reset IR button programming?

A: Press and hold TV and DEL button for 3 seconds.

Q: Cursor is moving itself or working not precisely.

A: Please reset gyroscope, press and hold HOME and OK button for 3 seconds.

Q: Some functions do not work or work different than expected.

A: Since many TV set brands have different operating systems some air mouse functions may not work as expected.

*Due to continuous development specification and appearance of product are subject to change without prior notice. For technical support please visit [www.media-tech.eu](http://www.media-tech.eu).*